




TWIGA FLEXIBLE DUCT

A Modular and Economical Air Distribution System with Maintenance Free Life

- Reduces Total Installed Cost - Fast and Easy to Install
- Air Tight - No Air Leakage, No Fiber Erosion
- Insulation - "Twiga Insul" - Class 'O' rated Glasswool
- Core Material - Low Friction Loss, Strong and Flame Resistant
- Vapour Barrier - Reinforced for Maximum Toughness and Tear Resistance
- Wire - Strong and Non Corrosive

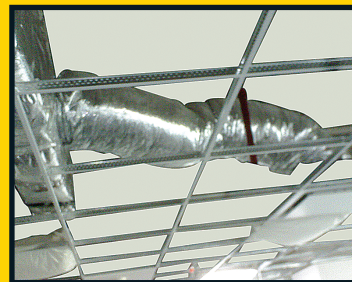

 **TWIGA**
insulating today for
a better tomorrow

Product Overview

- “Twiga Flexible Duct” designed for HVAC systems is strong, light weight, fully flexible, compressible yet dimensionally stable.
- Inner core is made of laminated films permanently bonded to a coated tough steel wire helix.
- Thermal efficiency is provided by wrapping exterior of the inner core with a blanket of glasswool insulation in various density and thickness as per the required thermal resistance.
- Outer jacket which acts as a vapor barrier is tear and abuse resistant and is made of double laminated film with glass yarn reinforcement.

Application and Benefits

- Ideal for all air-conditioning and ventilating systems in hospitals, hotels, industrial, residential, commercial and office buildings.
- Available as bare and pre insulated.
- Due to high degree of flexibility, allows ducting around obstacles where prefabricated metal ducts would be difficult and costly to install.
- A quick and economical means of correcting misalignment between system components.

Specifications

| | |
|--|---|
| Standard Length | 7.62 m (25 ft.) |
| Diameter Range | 100 mm to 500 mm (4 inch to 20 inch) |
| Maximum Rated Velocity | 20.32 m/s (4000 ft/min) |
| Temperature Range | 0°C-90°C (32°F - 194°F) |
| Maximum Rated Positive Pressure | 253.99 mm w.g. (10 inch w.g.) |
| Maximum Rated Negative Pressure | 25.39 mm w.g. (1 inch w.g.) |
| Fire Rating | Certified as per BS 476 Part 5 and 6 |
| For Insulated Ducts | |
| Standard Insulation Density | 16 Kg/m ³ (1 lb/ft ³) |
| Standard Insulation Thickness | 25mm (0.98 inch) |
| Insulation R Value | 0.64m ² K/W (3.63°Fft ² hr/Btu) |
| NOTE: Alternate insulation density and thickness are available upon request for higher thermal resistance | |

Material of Construction


Inner Core – Available Configurations

- Metalised polyester film on inside and outside
- Clear polyester film on inside and metalised film on outside.
- Clear polyester film on inside and outside.
- Metalised polyester film on inside and Aluminium film on outside.
- Aluminium film on inside and outside.

Outer Sleeve – Available Configurations

- Metalised polyester with glass yarn reinforcement.
- Other customised configurations available upon request.

Friction Loss Diagram

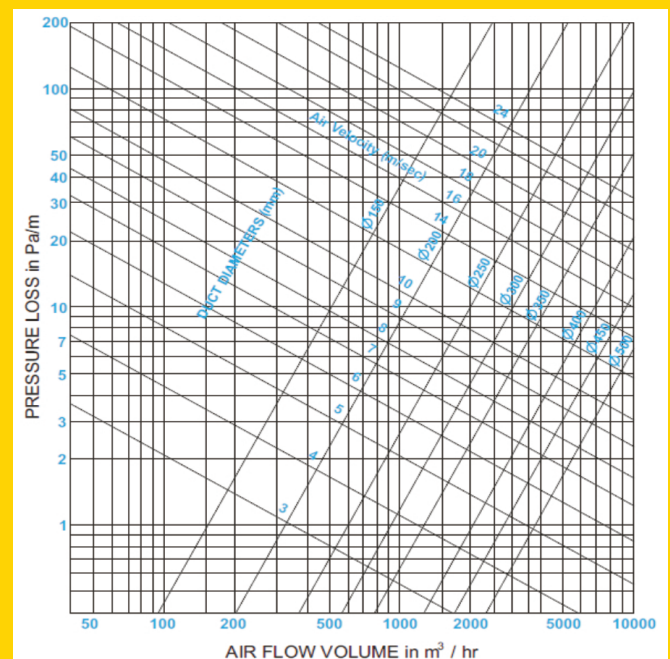

U.P. Twiga Fiberglass Limited

(An ISO 9001:2015 Certified Company)

Twiga House, 3 Community Centre, East of Kailash, New Delhi - 110 065, India

Tel.: +91 11 2646 0860 • Email: marketing@twigafiber.com

Website : www.twigafiber.com

TWIGA
insulating today for
a better tomorrow