

## VENTILATE ECONOMICALLY

### EC Propeller Fan



Low  
Energy



Full Speed  
Modulation



Quiet  
Operation





Pay Back is  
1.5 - 2 Years

## Technical Data

| Model      | Voltage | Frequency | Protection | Insulation Class | Speed RPM | Power Input Watts | Current Amps | Sound Pressure db(A) | Working Ambient Temp Range | Weight Kgs |
|------------|---------|-----------|------------|------------------|-----------|-------------------|--------------|----------------------|----------------------------|------------|
| CPEC-5D300 | 230     | 50        | IP-44      | B                | 2150      | 140               | 1.05         | 60                   | -30 to 60deg C             | 5          |
| CPEC-5D450 | 230     | 50        | IP-44      | B                | 1100      | 140               | 0.8          | 54                   | -30 to 60deg C             | 9.5        |



## 300EC Propeller Fan

| S. No.      | 1    | 2    | 3    | 4    | 5    | 6    | 7    | 8    |
|-------------|------|------|------|------|------|------|------|------|
| Speed [rpm] | 2150 | 1980 | 2060 | 2230 | 1650 | 1430 | 1520 | 1780 |
| Power [W]   | 140  | 128  | 128  | 139  | 83   | 77   | 77   | 86   |

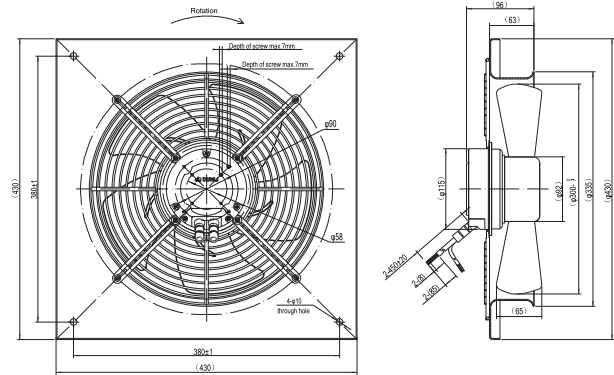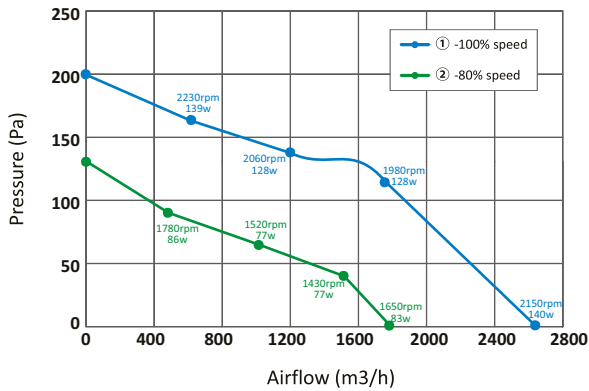

## 450EC Propeller Fan

| S. No.      | 1    | 2   | 3   | 4    | 5   | 6   | 7   | 8   |
|-------------|------|-----|-----|------|-----|-----|-----|-----|
| Speed [rpm] | 1100 | 980 | 950 | 1150 | 880 | 780 | 750 | 930 |
| Power [W]   | 140  | 132 | 132 | 143  | 100 | 93  | 93  | 102 |

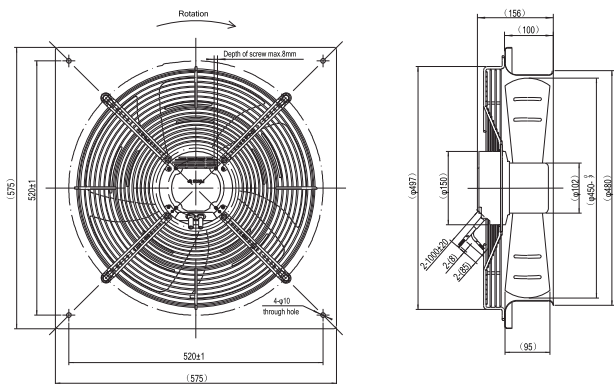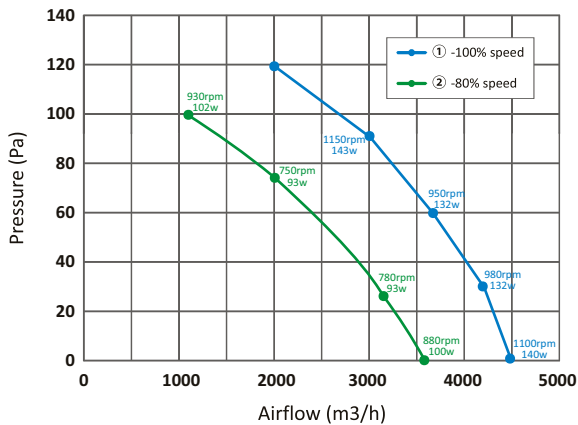

## Caryaire Equipments India Pvt. Ltd.

Head Office : B-34, Sector 85, Noida - 201 305, Uttar Pradesh (India)

Tel : +91 9818685552 E-mail : sales@caryaire.com

Mumbai : 207, Blue Rose Industrial Estate, Off Western Express Highway,

Borivali (E), Mumbai - 400 066 Tel : 022 6570 2056/57 E-mail : salesmumbai@caryaire.com

Bangalore : 687, 16th Main, 39th Cross, Jayanagar 4th T Block, Bangalore - 560 041

Tel : 080 2665 2550/1323/1423 Email : salesbangalore@caryaire.com

www.caryaire.com